




NOVA TAPE S

Dot-free, flexible,
cuttable and dimmable tape.
Pre-wired tape, simple and
quick installation.
Easy to mount on smooth
surfaces thanks to high quality
3M tape at the back.

One BIN Only to ensure perfect
color consistency

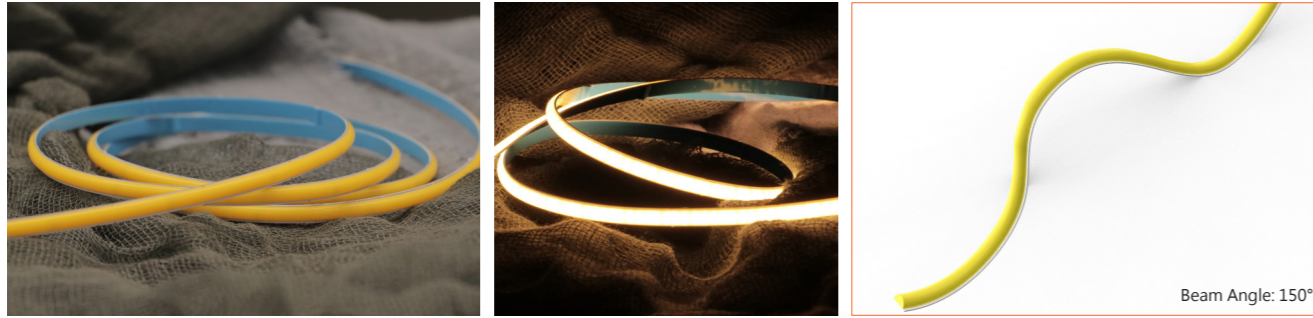


NOVA TAPE S

- Slim size in 4mm width, perfect solution for narrow lighting.
- Almost dot-free itself, which offer you great freedom of choosing profile.
- Wide color temperature range for your option.
- Long lifespan and excellent in heat dissipation.
- Use COB chips in One BIN Only to ensure perfect color consistency.
- High CRI90 to present real color.



Product Benefits:

- Flexible, cuttable and dimmable LED strip.
- Easy to mount on smooth surfaces thanks to high quality 3M tape at the back.
- Pre-wired LED strip, simple and quick connection.

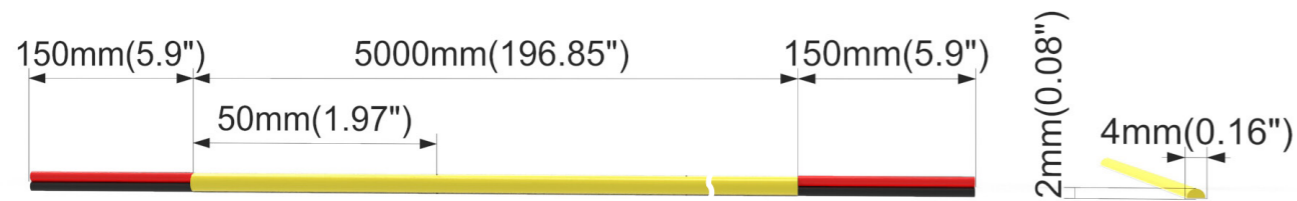

Electrical data

Voltage	DC24V (23.5V _{min} , 24.5V _{max})
LED PIN Temperature	Max. 65°C /149°F
Storage Temperature	-25°C /-13°F _{min} , 60°C /140°F _{max}
SMD Type	COB
LEDs/m	480LEDs/m
Efficacy (lm/W)	115lm/W@4000K
SDCM	3 (2700K, 3000K, 4000K)
CRI	Ra90
Max Current/LED	3.4mA
Cut Increments	50mm/1.97"
Waterproof Rate	IP20
Warranty	5 Years

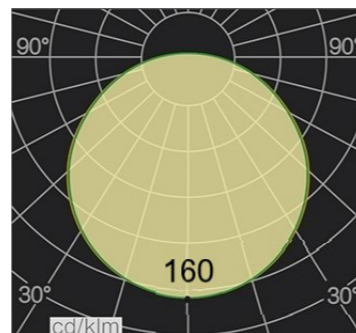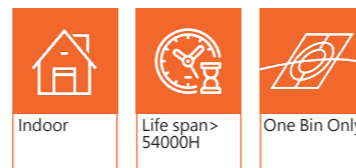

Lumen/ft	1.52W
2700K	146
3000K	158
3500K	166
4000K	175
6500K	171
Max. Run Length(ft)	16.40

Important notice

-The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.

Order code

SERIES NAME	COLOR	LENGTH	POWER
NOVA TAPE S	27= 2700K	1.97"-1181.10"	152=1.52W
	30= 3000K		
	35= 3500K		
	40=4000K		
	65=6500K		


Example 1:
NOVA TAPE S-27-196.85-152:
NOVA TAPE S, 2700K, 196.85"/reel,
1.52W/ft.

Example 2:
NOVA TAPE S-30-196.85-152:
NOVA TAPE S, 3000K, 196.85"/reel,
1.52W/ft.

Accessories

Art.#	Description	Picture	Art.#	Description	Picture
MF001	Male and Female connector, IP20		XLG-150-24-A	PSU 24V/150W IP67, Non-dimmable, White, 100-305V supply	
MF002	Male and Female DC connector, IP44		ELG-150-24B	PSU 24V/150W IP67, 3 in 1 dimming function, White, 100-305V supply	
T0001	VHB 3M adhesive tape		ELG-150-24DA	PSU 24V/150W IP67, DALI control technology, White, 100-305V supply	

Wiring connection

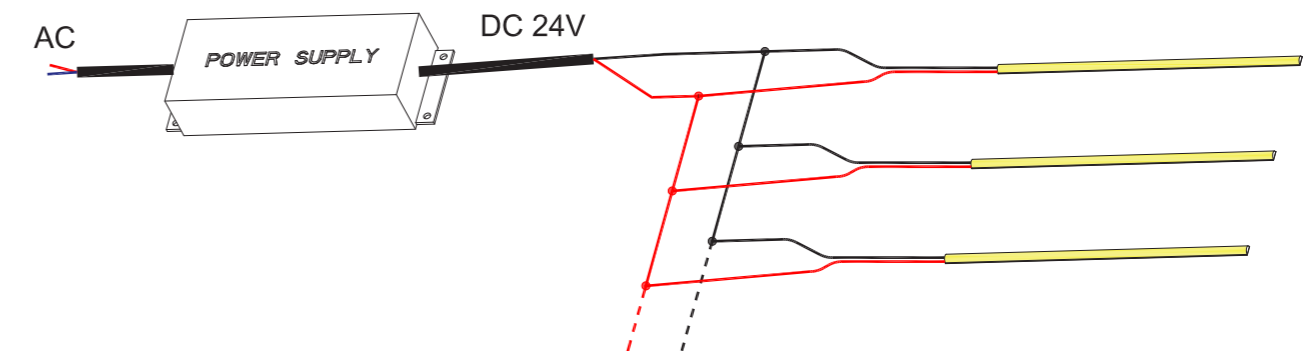

Application



Where to use the product?

NOVA TAPE S with slim size in 4mm width, a perfect solution for narrow space lighting. The slimmest ever in our tape series. Super flexible, cuttable, and dimmable which offers you more possibility to achieve unique projects.

You can use it in many places, for example, to effectively and elegantly highlight certain areas in the public areas, such as shopping malls, subways, libraries, or theaters. Or business areas such as companies, offices, meeting rooms, exhibition rooms, etc. ONE BIN ONLY, plus CRI90 to present the real value of NOVA TAPE S with pure luminance.



Beamever

Address: 100 N Howard St Ste R,
Spokane, WA, 99201-0508 USA
Tel: 323-5104660
info@beamever.com
www.beamever.com