

Beamever

LINIO NEON EOS TV TW

Flexible,
cuttable and dimmable tape.
Pre-wired tape, simple and
quick installation.
Easy to mount on smooth
surfaces thanks to high quality
3M tape at the back.

One BIN Only to ensure perfect
color consistency



Beamever





LINIO NEON EOS TV TW

- IP65 protection with high performance silicone, UV resistant, solvents resistant.
- White adjustable from very warm white 2700K to cool white 6500K.
- Perfect color consistency thanks to 3-Step LED in One BIN Only.
- 30m/reel(98.43ft/reel) maximum. And max. run length refers to single side feed in serial connection.
- Easy to be cut and reconnected at project sites. Also, custom length is available as well.

Product Benefits:

- Flexible, cuttable and dimmable LED strip.
- Easy to mount on smooth surfaces thanks to high quality red VHB tape at the back.
- Pre-wired LED strip, simple and quick connection.

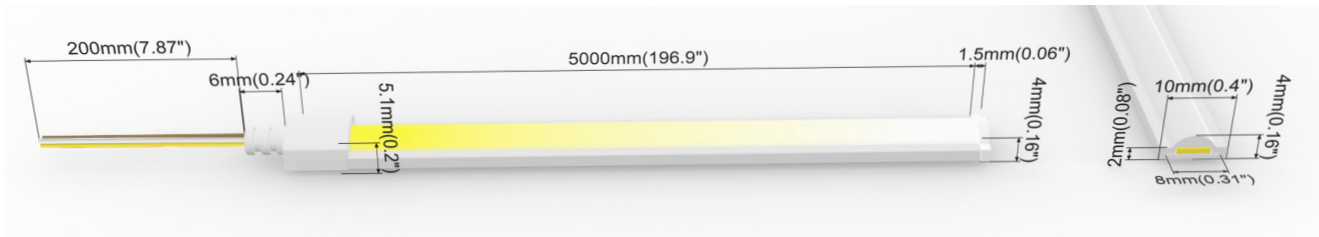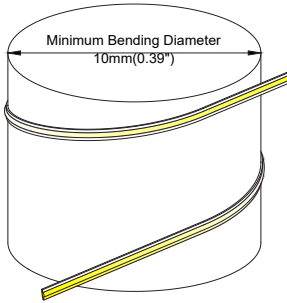

Electrical data


Voltage	DC24V (23.5V _{min} , 24.5V _{max})
LED PIN Temperature	Max. 65°C /149°F
Storage Temperature	-25°C /-13°F _{min} , 60°C /140°F _{max}
Min. Ambient Tempt.(Ta _{min})	-25°C /-13°F
Max. Ambient Tempt.(Ta _{max})	55°C /131° F@1.52W, 45°C /113° F@3.05W
Power(W/ft)	3.05
Efficacy (lm/W)	74lm/W@2700K+6500K
SDCM	3
CRI	Ra90
Cut Increments	83.3mm/3.28"
Warranty	5 Years



CCT	Lumen/ft	Max. Watt (W/ft)	Max. Run Length (ft)
2700K	105	1.52	16.40
6500K	122	1.52	16.40
2700K+6500K	226	3.05	16.40

Important notice

- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- The given color temperature is neon flex (after extrusion) color temperature.

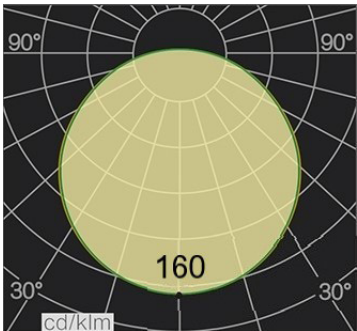

Order code


SERIES NAME	COLOR	LENGTH	POWER
LN EOS TV TW	2765 = 2700K+6500K	3.28"-1181.10"	305=3.05W

Example 1:
LN EOS TV TW-2765-196.85-305:
LINIO NEON EOS TV TW, 2700K+6500K,
196.85"/reel, 3.05W/ft.


Accessories

Art.#	Description	Picture	Art.#	Description	Picture
MF004	Male and Female connector, IP20		M2+M3-3A	RF Controller 144W DC24V, 3A*2Channel, Max 6A IP20, Support remote control	
M0013	Plastic clip		XLG-150-24-A	PSU 24V/150W IP67, Non-dimmable, White, 100-305V supply	
T0001	VHB 3M adhesive tape		ELG-150-24B	PSU 24V/150W IP67, 3 in 1 dimming function, White, 100-305V supply	

Wiring connection

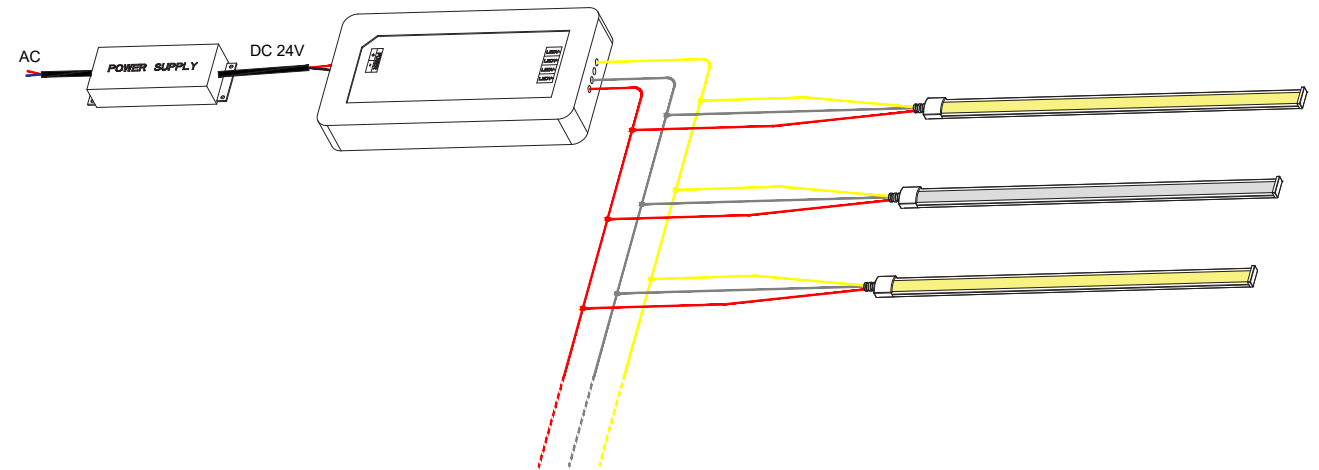

Application

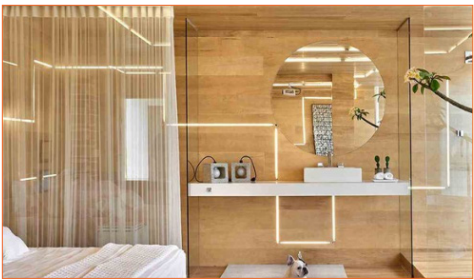

Where to use the product?

LINIO NEON EOS TV TW are a top choice for interior lighting. This dynamic white LED strip gives you vibrant white options from 2700K warm white to 6500K cool white. Adjust color temperature and brightness at the tip of your finger when pairing with our tunable white controller. It uses a combination of cool white LED and warm white led that give off a smooth stream of light that easily transitions between cool, neutral and warm white.

The lighting designers can apply LINIO NEON EOS TV TW in many places, such as a high-end bar in the hotel; a fancy restaurant, and a modern living room in a luxury villa. As long as you can imagine, LINIO NEON EOS TV TW can help you.



Beamever

Address: 100 N Howard St Ste R,
Spokane, WA, 99201-0508 USA

Tel: 323-5104660

info@beamever.com

www.beamever.com