


NOVA TAPE TW

Dot-free, flexible,
cuttable and dimmable tape.
Pre-wired tape, simple and
quick installation.
Easy to mount on smooth
surfaces thanks to high quality
3M tape at the back.

One BIN Only to ensure perfect
color consistency



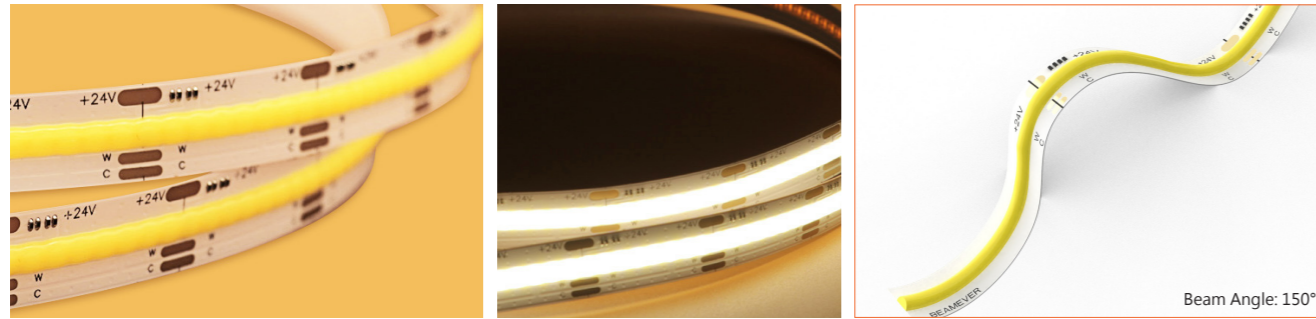


NOVA TAPE TW

- Almost dot-free itself, which offer you great freedom of choosing profile.
- High lumen and fancy looking by the unique design.
- White adjustable from very warm white 2700K to cool white 6500K.
- Long lifespan and excellent in heat dissipation.
- Use COB chips in One BIN Only to ensure perfect color consistency.
- High CRI90 to present real color.



Product Benefits:

- Flexible, cuttable and dimmable LED strip.
- Easy to mount on smooth surfaces thanks to high quality 3M tape at the back.
- Pre-wired LED strip, simple and quick connection.

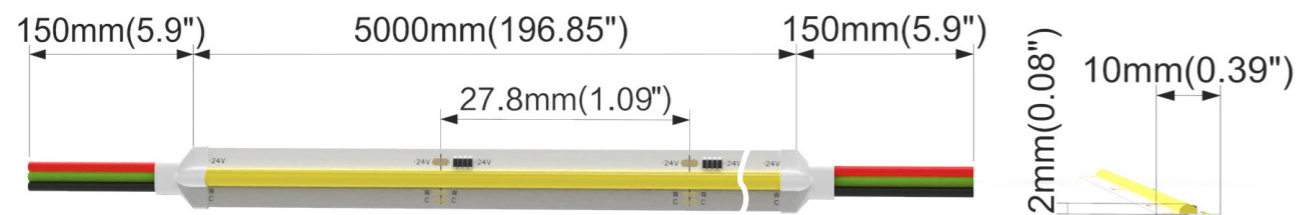

Electrical data

Voltage	DC24V (23.5V _{minv} 24.5V _{max})
LED PIN Temperature	Max. 65°C /149°F
Storage Temperature	-25°C /-13°F _{minv} 60°C /140°F _{max}
SMD Type	COB
LEDs/m	576LEDs/m
Efficacy (lm/W)	107lm/W@2700K+6500K
SDCM	3 (2700K, 3000K, 4000K)
CRI	Ra90
Max Current/LED	8.6mA
Cut Increments	27.8mm/1.09"
Waterproof Rate	IP20
Warranty	5 Years

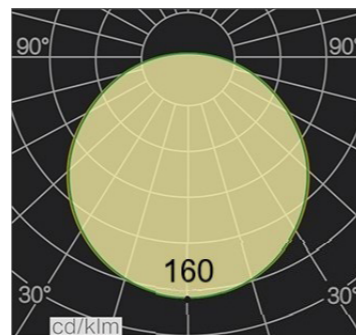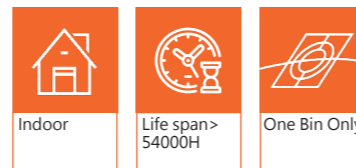

CCT	Lumen/ft	Max. Watt (W/ft)	Max. Run Length (ft)
2700K	229	2.29	16.40
6500K	269	2.29	16.40
2700K+6500K	489	4.57	16.40

Important notice

-The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.



Order code


SERIES NAME	COLOR	LENGTH	POWER
NOVA TAPE TW	2765 = 2700K+6500K	1.09"-1968.50"	457=4.57W

Example 1:
NOVA TAPE TW-2765-196.85-457:
NOVA TAPE TW, 2700K+6500K,
196.85"/reel, 4.57W/ft.


Accessories

Art.#	Description	Picture	Art.#	Description	Picture
MF004	Male and Female connector, IP20		M2+M3-3A	RF Controller 144W DC24V, 3A*2Channel, Max 6A IP20, Support remote control	
MF005	Male and Female DC connector, IP44		XLG-150-24-A	PSU 24V/150W IP67, Non-dimmable, White, 100-305V supply	
T0001	VHB 3M adhesive tape		ELG-150-24B	PSU 24V/150W IP67, 3 in 1 dimming function, White, 100-305V supply	

Wiring connection

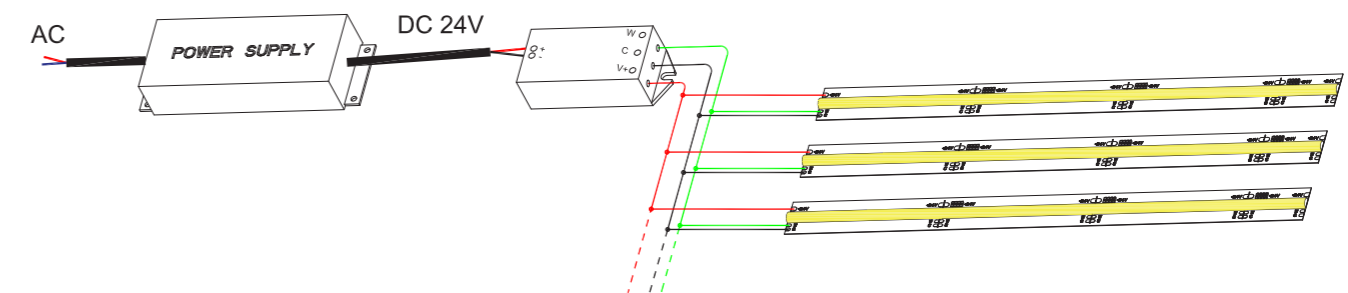

Application

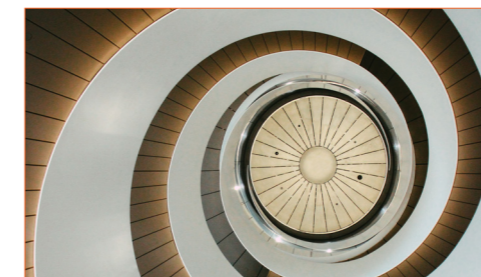

Where to use the product?

NOVA TAPE TW comes with tunable white from warm white 2700K to cold white 6500K. ONE BIN ONLY, CRI90, ultra flexible, cuttable, and dimmable. NOVA TAPE TW is a great option for your projects. Maintain the best luminance and durable working performance.

Apply it inside of a high-end residential community in L.A.; Lamborghini' s new product exhibition-room; a kindergarten classroom in Finland. Impressively versatile applications that lighting designers will know and love.



Beamever

Address: 100 N Howard St Ste R,
Spokane, WA, 99201-0508 USA
Tel: 323-5104660
info@beamever.com
www.beamever.com