


ALTA TAPE

Flexible,
cuttable and dimmable tape.
Pre-wired tape, simple and
quick installation.
Easy to mount on smooth
surfaces thanks to high quality
3M tape at the back.

One BIN Only to ensure perfect
color consistency



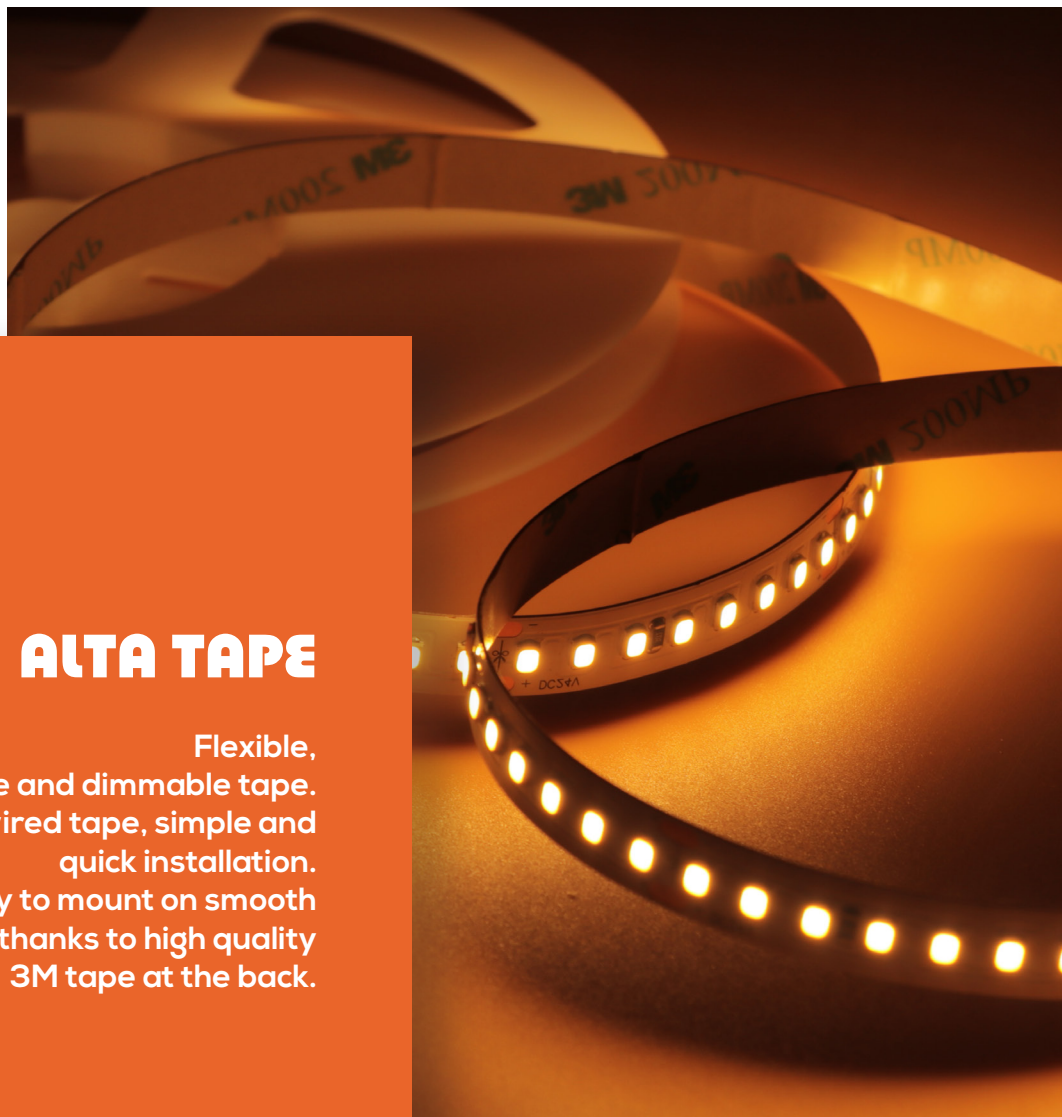


ALTA TAPE

- High lumen efficiency, up to 150lm/w Ra90 to achieve energy saving.
- With 160 high quality LEDs per meter and a width of 10mm/0.39".
- Wide color temperature range for your option.
- Long lifespan and excellent in heat dissipation.
- Use SDCM3 2835 LEDs in One BIN Only to ensure perfect color consistency.
- High CRI90 to present real color.

Product Benefits:



- Flexible, cuttable and dimmable LED strip.
- Easy to mount on smooth surfaces thanks to high quality 3M tape at the back.
- Pre-wired LED strip, simple and quick installation.

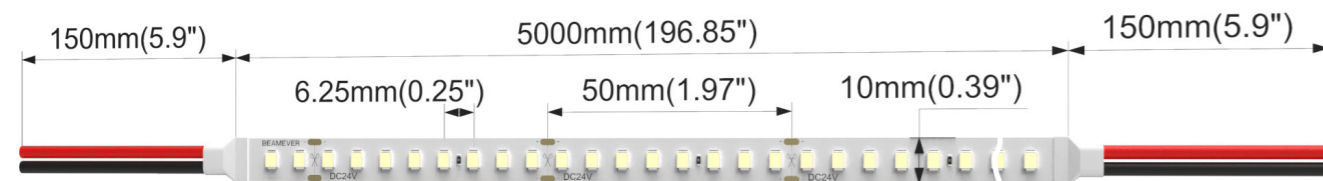

Electrical data

Voltage	DC24V (23.5V _{min} 24.5V _{max})
LED PIN Temperature	Max. 65°C /149°F
Storage Temperature	-25°C /-13°F _{min} 60°C /140°F _{max}
SMD Type	2835
LEDs/m	160LEDs/m
Efficacy (lm/W)	150lm/W@4000K
SDCM	3 (2700K, 3000K, 4000K)
CRI	Ra90
Max Current/LED	43.8mA@6.4W/ft
Cut Increments	50mm/1.97"
Waterproof Rate	IP20
Warranty	5 Years

Lumen/ft	1.46W	2.93W	4.39W	5.85W	6.40W
2700K	199	421	609	852	914
3000K	204	424	612	859	917
3500K	210	433	642	869	956
4000K	220	439	661	881	963
6500K	223	450	668	885	980
Max. Run Length(ft)	16.40	16.40	16.40	16.40	16.40

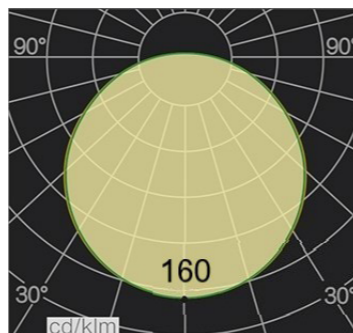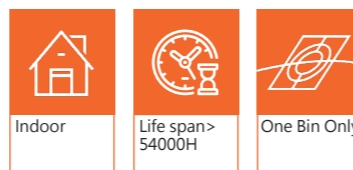

Order code

SERIES NAME	COLOR	LENGTH	POWER
ALTA TAPE	27= 2700K	1.97"-1968.50"	146=1.46W
	30= 3000K		293=2.93W
	35= 3500K		439=4.39W
	40=4000K		585=5.85W
	65=6500K		640=6.40W


Example 1:
ALTA TAPE-27-196.85-146:
ALTA TAPE, 2700K, 196.85"/reel,
1.46W/ft.

Example 2:
ALTA TAPE-30-196.85-293:
ALTA TAPE, 3000K, 196.85"/reel,
2.93W/ft.


Accessories

Art.#	Description	Picture	Art.#	Description	Picture
C0009	Connector for Strip to strip connection, IP20		T0001	VHB 3M adhesive tape	
C0010	Connector for Strip to cable connection, IP20		XLG-150-24-A	PSU 24V/150W IP67, Non-dimmable, White, 100-305V supply	
MF001	Male and Female connector, IP20		ELG-150-24B	PSU 24V/150W IP67, 3 in 1 dimming function, White, 100-305V supply	
MF002	Male and Female DC connector, IP44		ELG-150-24DA	PSU 24V/150W IP67, DALI control technology, White, 100-305V supply	

Wiring connection

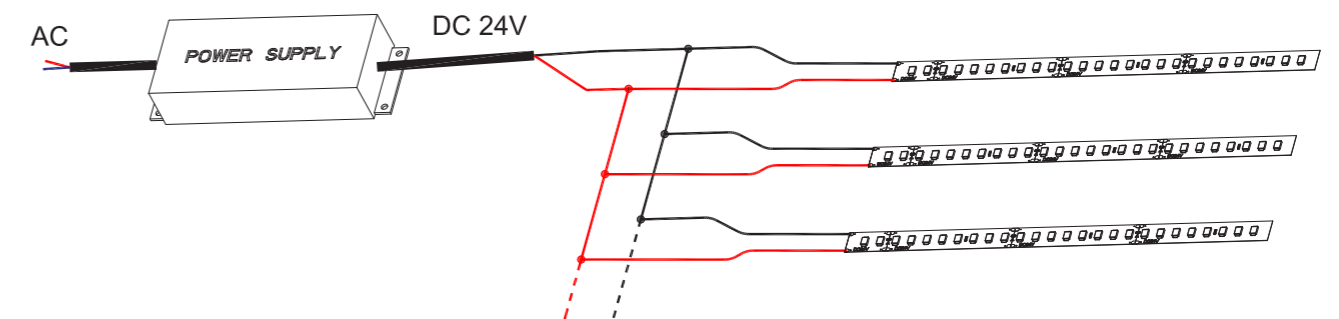

Application

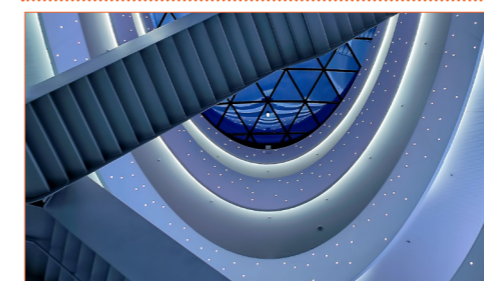

Where to use the product?

ALTA TAPE comes with full CCT range and various wattage options to meet your different project needs. ONE BIN ONLY to maintain excellent color consistency for you, because we care about every single detail. We offer customized service to find the best solution for you.

Suitable for various applications in daily life, for example, residential apartments, shopping malls, office space.... Generally, all interior and wet areas can be elevated by creating stylish lighting with our LED tape.



Beamever

Address: 100 N Howard St Ste R,
Spokane, WA, 99201-0508 USA
Tel: 323-5104660
info@beamever.com
www.beamever.com