

## ANNO TAPE S Indoor · Static White

## Features

- 4mm (0.16") ultra-slim, ideal for edge lighting applications
- Field cuttable
- Low voltage DC24V
- 500 lumen outputs
- IP20 rated, ideal for indoor uses
- 5 years warranty




Date \_\_\_\_\_ Fixture type \_\_\_\_\_

Project name \_\_\_\_\_ Project phase \_\_\_\_\_



## Dimension

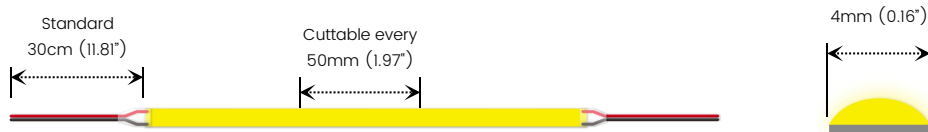

## Order Code

| Series | Environment   | Voltage  | Temp./Color                                  | Power              |
|--------|---------------|----------|----------------------------------------------|--------------------|
| ANNOS  | D2 Dry (IP20) | 24 DC24V | 27 2700K<br>30 3000K<br>40 4000K<br>65 6500K | 050 5W/M -500 lm/M |

## Assembly Builder

| Left Feed Entry |        |    |                                  | Right Feed Entry |        |    |                                  | Illuminated Length <sup>1</sup> |      |     |
|-----------------|--------|----|----------------------------------|------------------|--------|----|----------------------------------|---------------------------------|------|-----|
| F               | Front  | OW | Open wire 30cm                   | F                | Front  | OW | Open wire 30cm                   | Max.                            | 5m   | -5W |
| C               | Closed | MC | Male connector with 20cm cable   | C                | Closed | MC | Male connector with 20cm cable   | Increment                       | 50mm |     |
|                 |        | FC | Female connector with 20cm cable |                  |        | FC | Female connector with 20cm cable |                                 |      |     |
|                 |        | NA | Only for Closed Feed Entry       |                  |        | NA | Only for Closed Feed Entry       |                                 |      |     |

| Temp./Color         | 5W/M     |
|---------------------|----------|
| 2700K               | 480      |
| 3000K               | 519      |
| 4000K               | 575      |
| 6500K               | 560      |
| Max. Run Length (M) | 5        |
| Storage Temperature | -25~60°C |
| Ambient Temperature | -20~45°C |

## Technical Details

|                      |                          |
|----------------------|--------------------------|
| Width                | 4mm (0.16")              |
| PCB Width            | 4mm (0.16")              |
| LED Quantity         | 480 LEDs/M (146 LEDs/ft) |
| Beam Angle           | 150°                     |
| Efficacy             | 115lm/W @4000K 5W        |
| CRI                  | Ra≥90                    |
| Lumen Maintenance    | > 54,000 hours           |
| Max. Length Per Reel | 30M (98.4')              |

## Feed Entry Options

F: Front



C: Closed



## Connector Wire Options



**OW:** Open wire, **Dry only**  
Standard 1m (3.28'), 20 AWG  
(wire length customizable)



**MC:** Male connector, **Dry & Damp**  
Standard 20cm (0.66'), 20 AWG



**FC:** Female connector, **Dry & Damp**  
Standard 20cm (0.66'), 20 AWG


# ANNO TAPE S

Indoor · Static White

## Channel Compatibility

: No pixelation

## Minimalistic

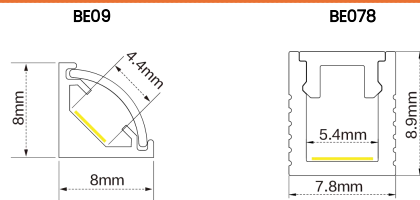


## Drivers


| Code            | Max Load | Input                  | Output | Dimming                 | Environment   | Size (L*W*H)       |
|-----------------|----------|------------------------|--------|-------------------------|---------------|--------------------|
| XLG-I50-24-A    | 150W     | 100-305VAC             | 24VDC  | Non-Dim                 | Dry/Damp/IP67 | 180 * 63 * 35.5 mm |
| ELG-I50-24B-3Y  | 150W     | 100-305VAC             | 24VDC  | 3 in 1 dimming          | Dry/Damp/IP67 | 219 * 63 * 35.5 mm |
| ELG-I50-24DA-3Y | 150W     | 100-305VAC             | 24VDC  | DALI control technology | Dry/Damp/IP67 | 219 * 63 * 35.5 mm |
| LPV-I50-24      | 150W     | 100-277VAC             | 24VDC  | Non-Dim                 | Dry/Damp/IP67 | 148 * 40 * 30 mm   |
| LRS-I50-24      | 150W     | 85-132VAC / 170-264VAC | 24VDC  | Non-Dim                 | Dry           | 99 * 97 * 30 mm    |
| PWM-I20-24      | 120W     | 90-305VAC / 127-431VAC | 24VDC  | 3 in 1 dimming          | Dry/Damp/IP67 | 191 * 63 * 37.5 mm |

## Wiring Diagram

### Non-dimmable

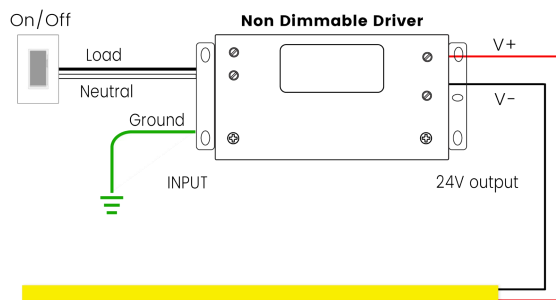

### Dimmable

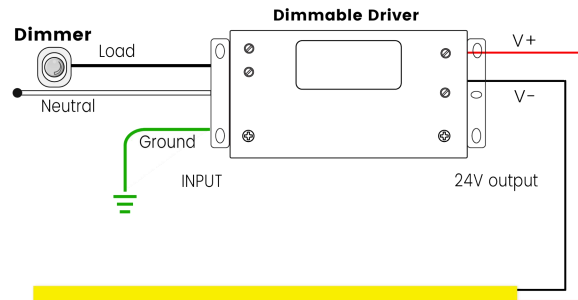

## Additional Accessories (Optional, purchase for extra)



### MCB-DC-44

Male DC connector with 20cm (0.66') cable, IP44, Dry & damp, 20 AWG

### FCB-DC-44

Female DC connector with 20cm (0.66') cable, IP44, Dry & damp, 20 AWG

### VHB

VHB 3M adhesive back tape, stronger stickiness