

ANNO TAPE S TW

Indoor · Tunable White

Features

- 4mm (0.16") ultra-slim, ideal for edge lighting applications
- Field cuttable
- Low voltage DC24V
- 400 lumen outputs
- IP20 rated, ideal for indoor uses
- 5 years warranty



Date

Fixture type

Project name

Project phase



Dimension



Order Code

Series	Environment	Voltage	Temp./Color	Power
ANNOS	D2 Dry (IP20)	24 DC24V	2750 2700K+5000K	060 6W/M ~400 lm/M

Assembly Builder

Left Feed Entry				Right Feed Entry				Illuminated Length ¹		
F	Front	OW	Open wire 30cm	F	Front	OW	Open wire 30cm	Max.	5m	~6W
C	Closed	MC	Male connector with 20cm cable	C	Closed	MC	Male connector with 20cm cable	Increment	27.8mm	
		FC	Female connector with 20cm cable			FC	Female connector with 20cm cable			
		NA	Only for Closed Feed Entry			NA	Only for Closed Feed Entry			

Temp./Color	6W/M
2700K	418
5000K	520
2700K+5000K	470
Max. Run Length (M)	5
Storage Temperature	-25~60°C
Ambient Temperature	-20~45°C

Technical Details

Width	4mm (0.16")
PCB Width	4mm (0.16")
LED Quantity	576 LEDs/M (175 LEDs/ft)
Beam Angle	150°
Efficacy	78.3lm/W @2700K+5000K 6W
CRI	Ra≥90
Lumen Maintenance	> 54,000 hours
Max. Length Per Reel	30M (98.4')

Feed Entry Options

F: Front



C: Closed



Connector Wire Options



OW: Open wire, **Dry only**
Standard 1m (3.28'), 20 AWG
(wire length customizable)



MC: Male connector, **Dry & Damp**
Standard 20cm (0.66'), 20 AWG




FC: Female connector, **Dry & Damp**
Standard 20cm (0.66'), 20 AWG


ANNO TAPE S TW

Indoor · Tunable White

Channel Compatibility

: No pixelation

Minimalistic

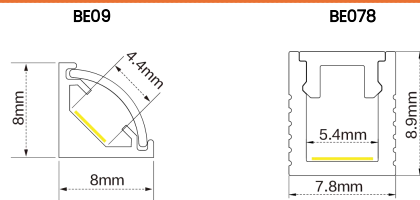

Drivers Options


Code	Max Load	Input	Output	Dimming	Environment	Size (L*W*H)
XLG-I50-24-A	150W	100-305VAC	24VDC	Non-Dim	Dry/Damp/IP67	180 * 63 * 35.5 mm
ELG-I50-24B-3Y	150W	100-305VAC	24VDC	3 in 1 dimming	Dry/Damp/IP67	219 * 63 * 35.5 mm
ELG-I50-24DA-3Y	150W	100-305VAC	24VDC	DALI control technology	Dry/Damp/IP67	219 * 63 * 35.5 mm
LPV-I50-24	150W	100-277VAC	24VDC	Non-Dim	Dry/Damp/IP67	148 * 40 * 30 mm
LRS-I50-24	150W	85-132VAC / 170-264VAC	24VDC	Non-Dim	Dry	99 * 97 * 30 mm
PWM-I20-24	120W	90-305VAC / 127-431VAC	24VDC	3 in 1 dimming	Dry/Damp/IP67	191 * 63 * 37.5 mm

Controllers

Code	Description	Environment	Size (L*W*H)
V2-S & R7-1	2 Colors 2 Wires LED Strip Controller, match with single zone R7-1 Color Temperature Remote, CE certified	Dry	4.72" *1.69" *1.06"

Wiring Diagram

Dimmable

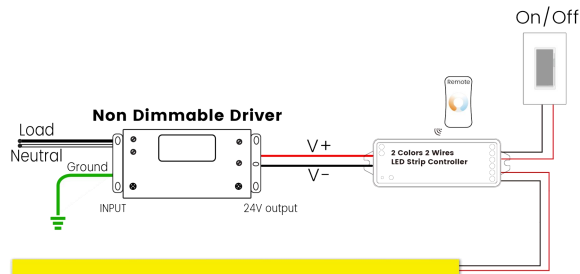

Additional Accessories (Optional, purchase for extra)



MCB-DC-44

Male DC connector with 20cm (0.66') cable, IP44, Dry & damp, 20 AWG

FCB-DC-44

Female DC connector with 20cm (0.66') cable, IP44, Dry & damp, 20 AWG

VHB

VHB 3M adhesive back tape, stronger stickiness