

ANNO TAPE Indoor · Static White


Features

- Max run length up to 8m (26.2ft) from single power feed
- Field cuttable & joinable
- Low voltage DC24V
- 600-1600 lumen outputs
- IP20 rated, ideal for indoor uses
- 5 years warranty



Date _____ Fixture type _____

Project name _____ Project phase _____



Dimension



Order Code

Series	Environment	Voltage	Temp./Color	Power
ANNO	D2 Dry (IP20)	24 DC24V	27 2700K 30 3000K 40 4000K 65 6500K	050 5W/M ~600 lm/M 100 10W/M ~1100 lm/M 150 15W/M ~1600 lm/M

Assembly Builder

Left Feed Entry				Right Feed Entry				Illuminated Length ¹		
F	Front	OW	Open wire 30cm	F	Front	OW	Open wire 30cm	Max.	8m	-5W
C	Closed	MC	Male connector with 20cm cable	C	Closed	MC	Male connector with 20cm cable		6m	-10W
		FC	Female connector with 20cm cable			FC	Female connector with 20cm cable		5m	-15W
		NA	Only for Closed Feed Entry			NA	Only for Closed Feed Entry	Increment	50mm	

Temp./Color	5W/M	10W/M	15W/M
2700K	510	950	1380
3000K	550	1000	1480
4000K	627	1105	1600
6500K	600	1100	1620
Max. Run Length (M)	8	6	5
Storage Temperature	-25-60°C	-25-60°C	-25-60°C
Ambient Temperature	-20-45°C	-20-45°C	-20-45°C

Technical Details

Width	10mm (0.39")
PCB Width	10mm (0.39")
LED Quantity	480 LEDs/M (146 LEDs/ft)
Beam Angle	180°
Efficacy	106.7lm/W @4000K 15W
CRI	Ra≥90
Lumen Maintenance	> 54,000 hours
Max. Length Per Reel	30M (98.4')

Feed Entry Options

F: Front



C: Closed



Connector Wire Options



OW: Open wire, **Dry only**
Standard 1m (3.28'), 20 AWG
(wire length customizable)



MC: Male connector, **Dry & Damp**
Standard 20cm (0.66'), 20 AWG




FC: Female connector, **Dry & Damp**
Standard 20cm (0.66'), 20 AWG

ANNO TAPE


Indoor · Static White

Channel Compatibility


: No pixelation

Universal


BEI215




BEI815




BEI415




BE2015




BEI202




BEI201




BEI207




BEI01




BE2020



BEI001




BEI002




Architectural


BE5615




BE7615




BE5315




BE4615




BE5035




BE3535



BE5075




BE8833




Main lighting


BE6575



BE9358



BE60




ANNO TAPE


Indoor · Static White

Special lighting

BE6728




BE2009



: Slight pixelation

Universal

BE2601




Drivers


Code	Max Load	Input	Output	Dimming	Environment	Size (L*W*H)
XLG-150-24-A	150W	100-305VAC	24VDC	Non-Dim	Dry/Damp/IP67	180 * 63 * 35.5 mm
ELG-150-24B-3Y	150W	100-305VAC	24VDC	3 in 1 dimming	Dry/Damp/IP67	219 * 63 * 35.5 mm
ELG-150-24DA-3Y	150W	100-305VAC	24VDC	DALI control technology	Dry/Damp/IP67	219 * 63 * 35.5 mm
LPV-150-24	150W	100-277VAC	24VDC	Non-Dim	Dry/Damp/IP67	148 * 40 * 30 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24VDC	Non-Dim	Dry	99 * 97 * 30 mm
PWM-120-24	120W	90-305VAC / 127-431VAC	24VDC	3 in 1 dimming	Dry/Damp/IP67	191 * 63 * 37.5 mm

Wiring Diagram

Non-dimmable

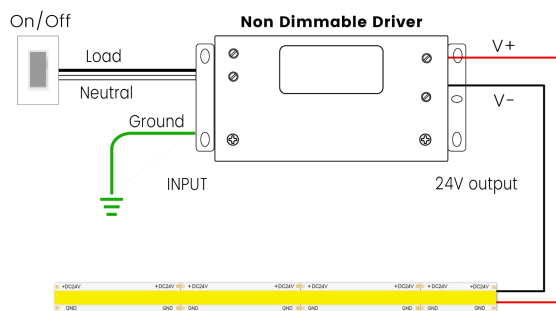

Dimmable

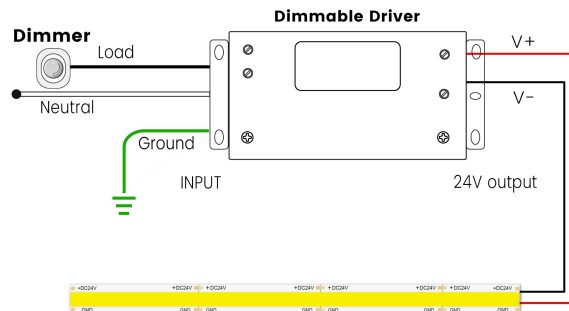

ANNO TAPE

Indoor · Static White

Connectors (Optional, purchase for extra)

**NI4CO-STCN-2P-10**

Strip to cable connector without wire, for 10mm (0.39") tape, 2 pin

**NI4CO-STC-2P-10**

Strip to cable connector with 15cm (5.91") wire, for 10mm (0.39") tape, 2 pin

**NI4CO-STSJ-2P-10**

Strip to strip jumper connector with 15cm (5.91") wire, for 10mm (0.39") tape, 2 pin

**NI4CO-STDCB-2P-10**

Strip to cable with black male & female connector, for 10mm (0.39") tape, 2 pin

**NI4CO-STDCW-2P-10**

Strip to cable with white male & female connector, for 10mm (0.39") tape, 2 pin

**NI4CO-STS-2P-10**

Strip to strip connector, for 10mm (0.39") tape, 2 pin

**CI4CO-LC-2P-10**

L-shaped corner connector, for 10mm (0.39") tape, 2 pin

**CI4CO-RC-2P-10**

R-shaped corner connector, for 10mm (0.39") tape, 2 pin

**NI6CO-L-2P-10**

L-shaped connector, for 10mm (0.39") tape, 2 pin

Additional Accessories (Optional, purchase for extra)

**MCB-DC-44**

Male DC connector with 20cm (0.66') cable, IP44, Dry & damp, 20 AWG

**FCB-DC-44**

Female DC connector with 20cm (0.66') cable, IP44, Dry & damp, 20 AWG

**VHB**

VHB 3M adhesive back tape, stronger stickiness