


## BELA TAPE RGBWW

Flexible,  
cuttable and dimmable tape.  
Pre-wired tape, simple and  
quick installation.  
Easy to mount on smooth  
surfaces thanks to high quality  
3M tape at the back.

One BIN Only to ensure perfect  
color consistency



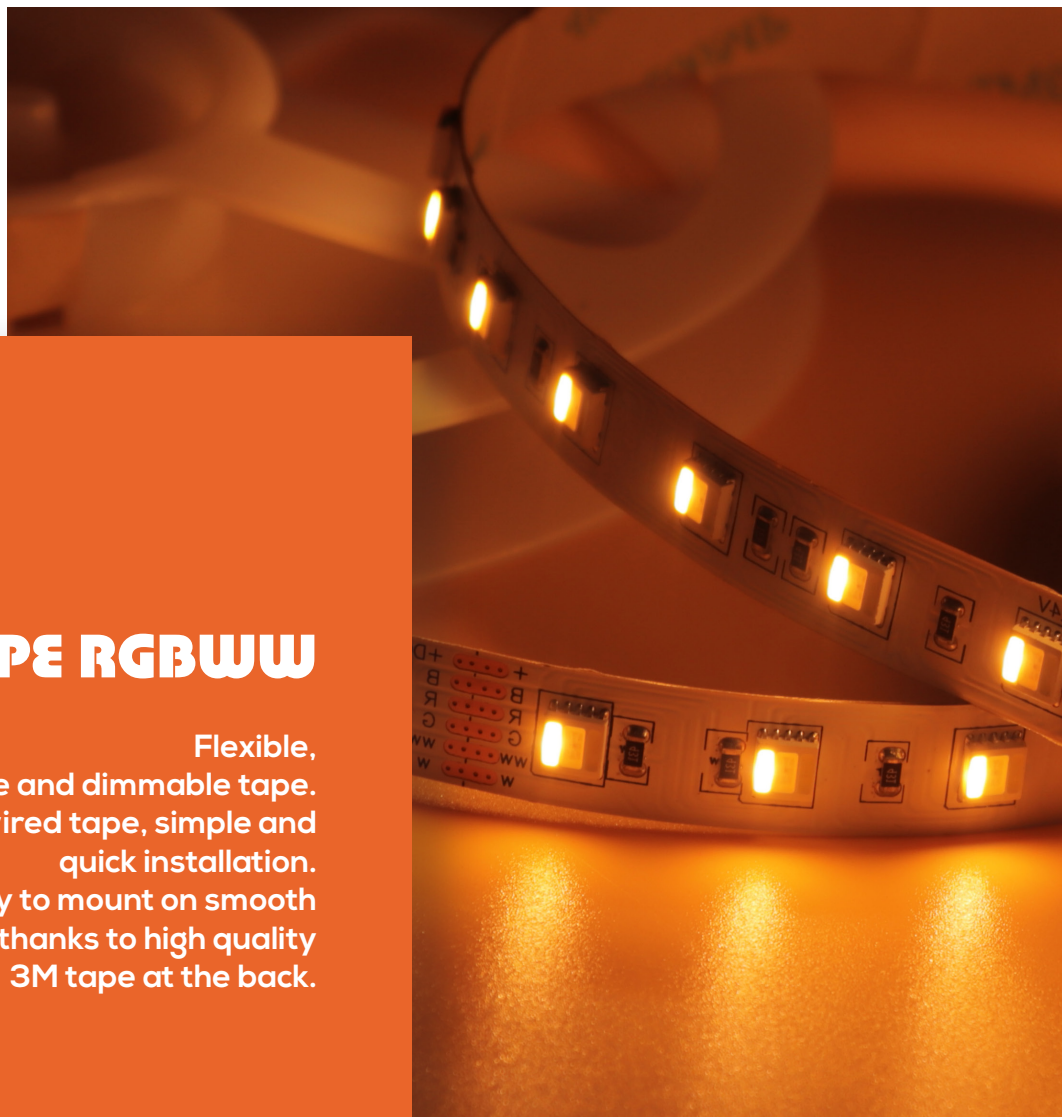


## BELA TAPE RGBWW

- With 5-in-1 5050 LED(RGB+ Tunable white2400K-6500K), 60leds/m and a width of 12mm/0.47".
- To provide with richer tones that were impossible to achieve before with a single strip.
- To create any color temperature of white light between 2700K and 6000K.
- High lumen and fancy looking by the unique design.
- Long lifespan and excellent in heat dissipation.
- One BIN Only to ensure perfect color consistency.


### Product Benefits:

- Flexible, cuttable and dimmable LED strip.
- Easy to mount on smooth surfaces thanks to high quality 3M tape at the back.
- Pre-wired LED strip, simple and quick connection.

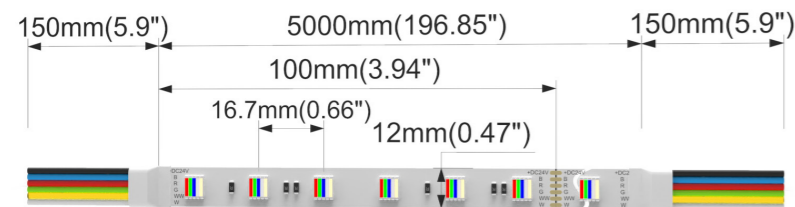

### Electrical data

Voltage	DC24V (23.5V <sub>min</sub> 24.5V <sub>max</sub> )
LED PIN Temperature	Max. 65°C /149°F
Storage Temperature	-25°C /-13°F <sub>min</sub> 60°C /140°F <sub>max</sub>
SMD Type	5050 (5 in 1)
LEDs/m	60LEDs/m
Efficacy (lm/W)	65lm/W@RGBWW2465
Color	RGBWW
CRI	Ra90
Max Current/LED	16mA
Cut Increments	100mm/3.94"
Waterproof Rate	IP20
Warranty	5 Years

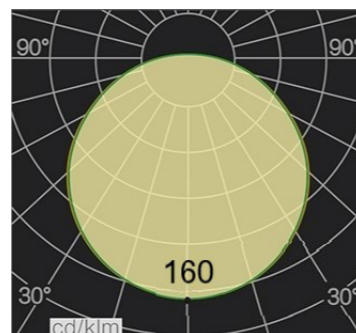

CCT	Lumen/ft	Max. Watt (W/ft)	Max. Run Length (ft)
R	27	1.16	16.40
G	73	1.16	16.40
B	19	1.16	16.40
W24	122	1.16	16.40
W65	146	1.16	16.40
RGBWW2465	381	5.85	16.40

### Important notice

-The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.

### Order code


SERIES NAME	COLOR	LENGTH	POWER
BELA TAPE RGBWW	RGBWW2465=RGB+2400K+6500K	3.94"-1968.50"	585=5.85W

Example 1:  
BELA TAPE RGBWW-196.85-585:  
BELA TAPE RGBWW(WW=2400K+6500K),  
196.85"/reel, 5.85W/ft.

### Accessories

Art.#	Description	Picture	Art.#	Description	Picture
C0015	Connector for Strip to strip connection, IP20		Q5+F5-DMX-4A	DC24V, 4A*5 Channel, Max 20A, IP20, support remote control	
C0016	Connector for Strip to cable connection, IP20		XLG-150-24-A	PSU 24V/150W IP67, Non-dimmable, White, 100-305V supply	
T0001	VHB 3M adhesive tape		ELG-150-24B	PSU 24V/150W IP67, 3 in 1 dimming function, White, 100-305V supply	

### Wiring connection

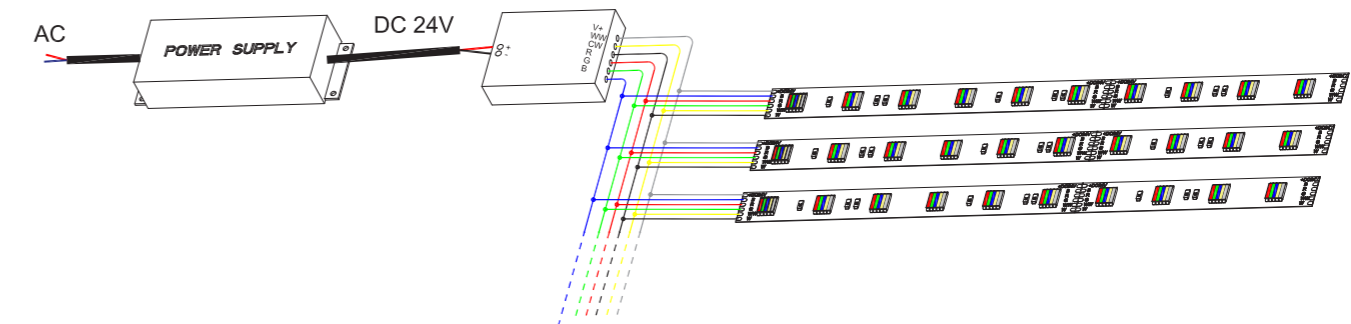


### Application



#### Where to use the product?

BELA TAPE RGBWW is made with amazing 5-in-1 LEDs to provide richer tones that were impossible to achieve before within a single tape. Homogeneous, ONE BIN ONLY, and White CCTs range from 2700K to 6000K, it can fulfill all your expectations.

Applications in public places such as bars, museums, shopping malls, VIP restrooms in airports, etc. Or personal places such as bedroom, kitchen, bathroom, closet, backyard, etc. BELA is a highly versatile and practical product for all of your interior and decorative purposes.

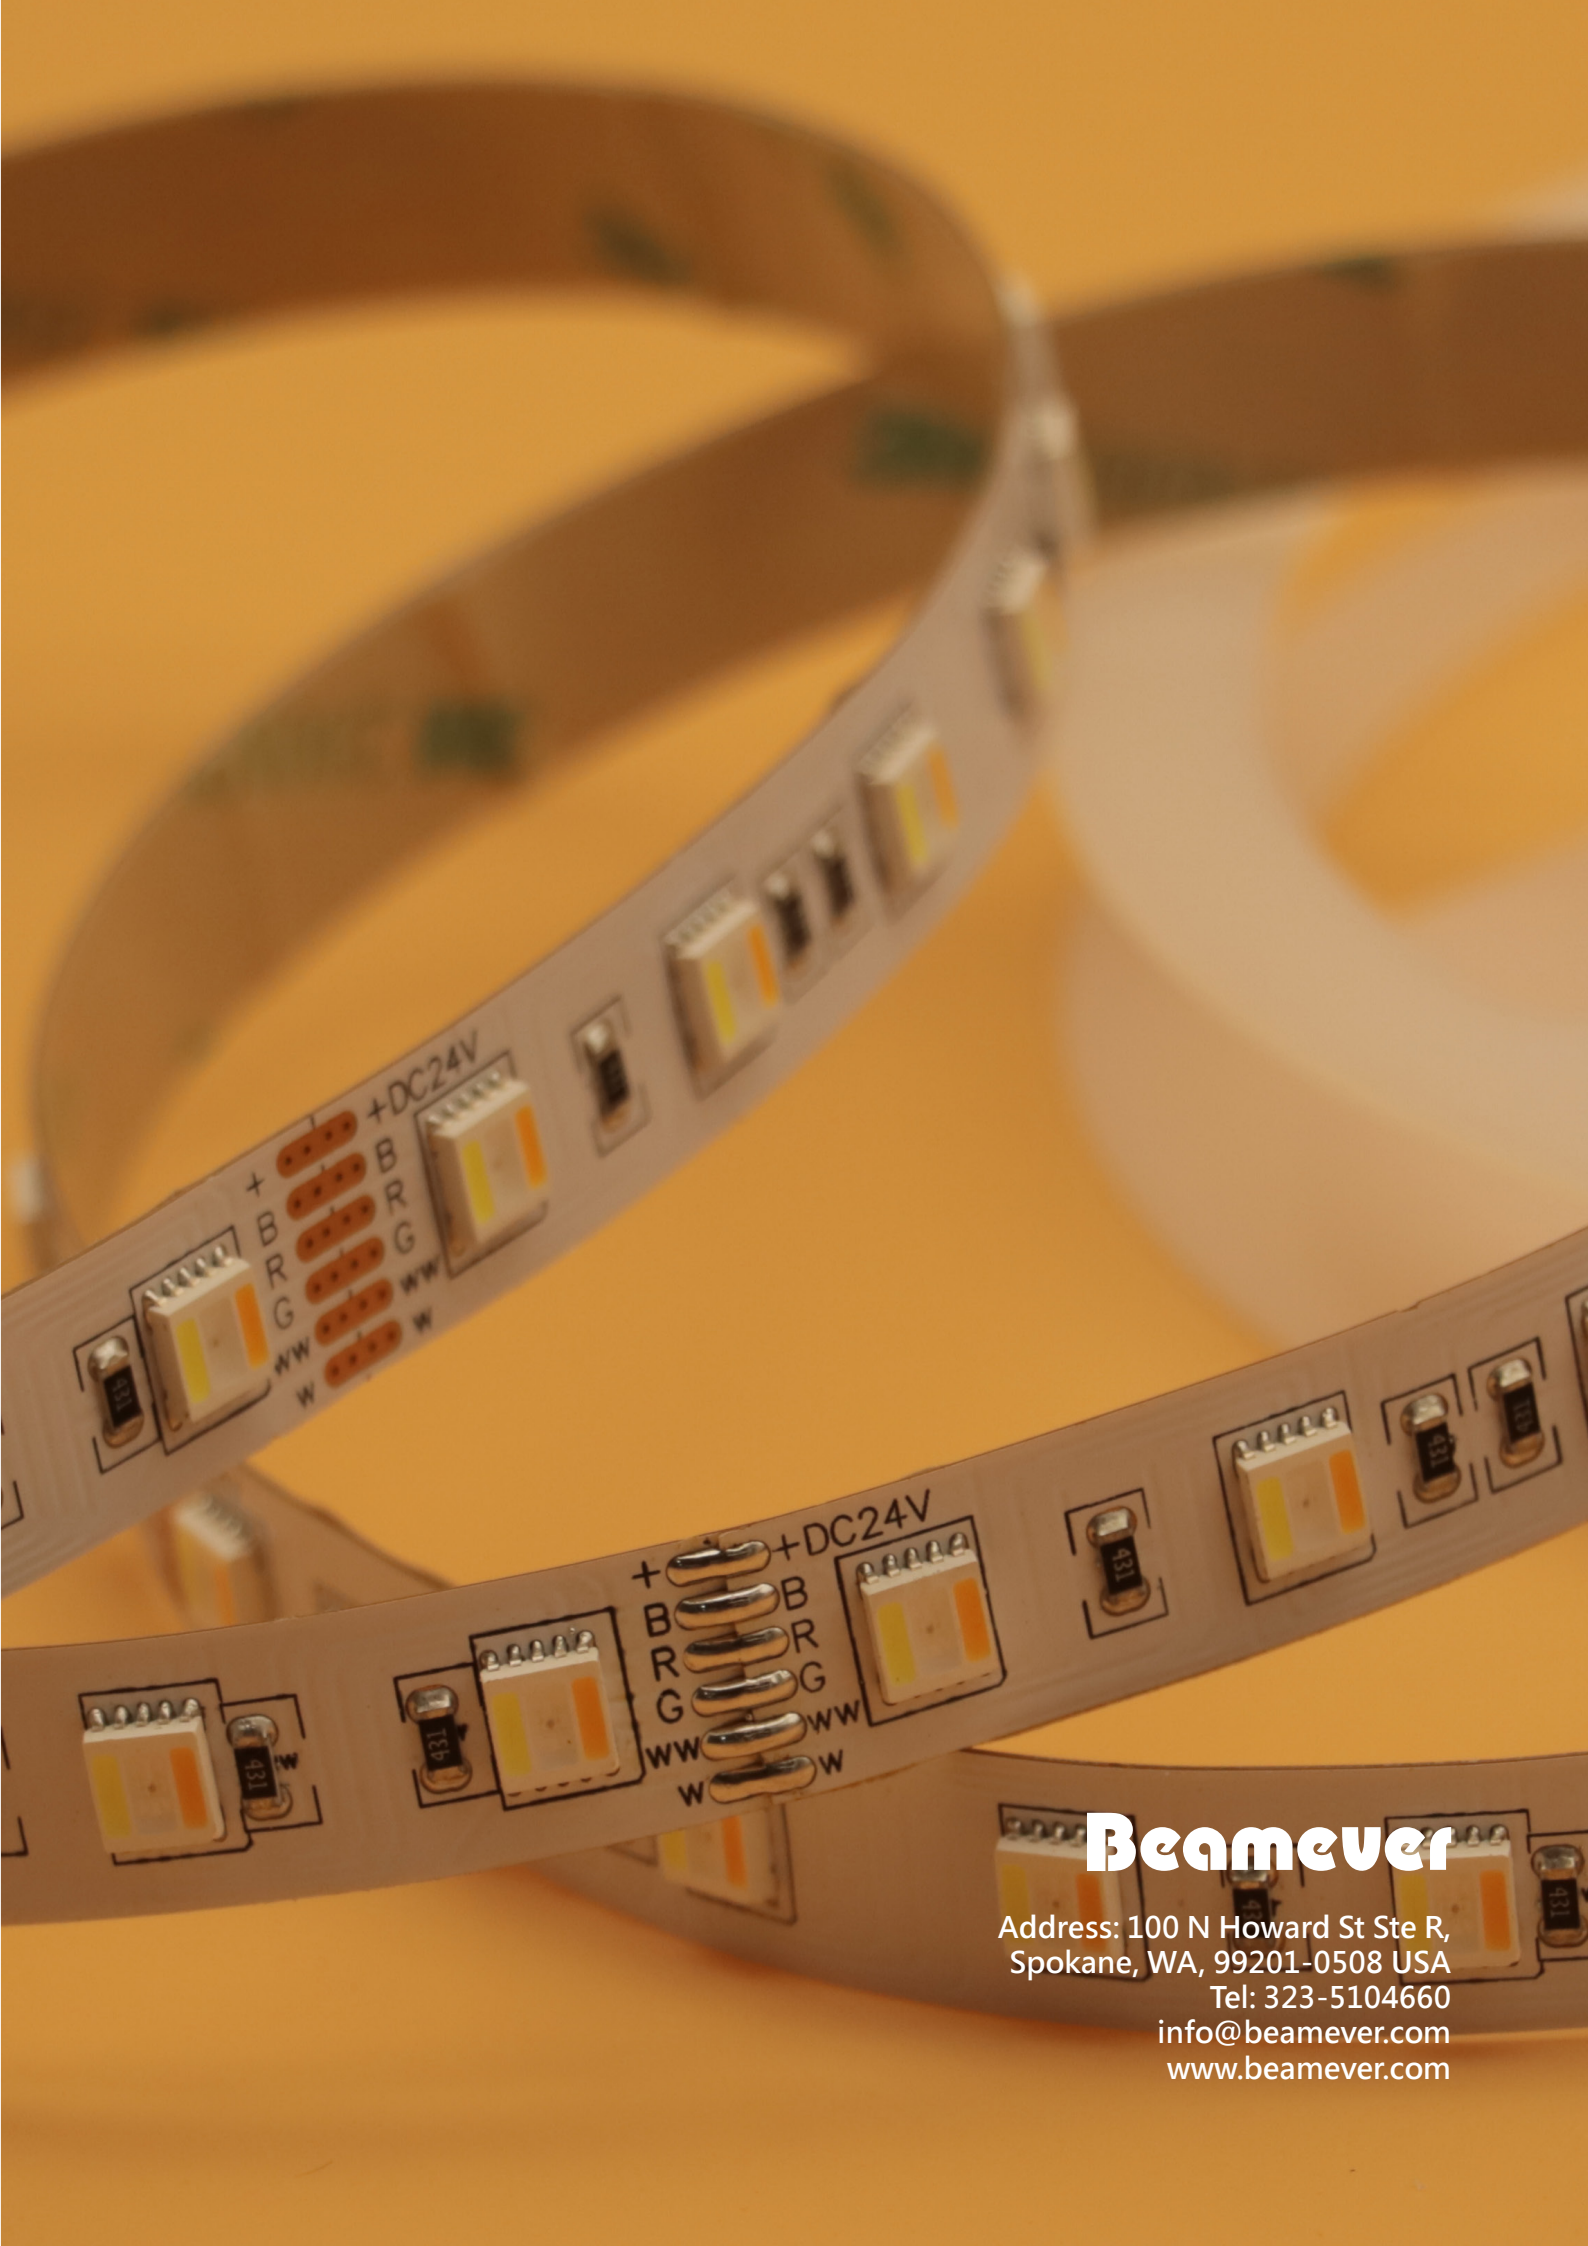

# Beamever

Address: 100 N Howard St Ste R,  
Spokane, WA, 99201-0508 USA  
Tel: 323-5104660  
info@beamever.com  
www.beamever.com